


ECO No.	REV	DESCRIPTION	REVISED	DATE	APPROVED	DATE
E05-0106	A	INITIAL RELEASE				

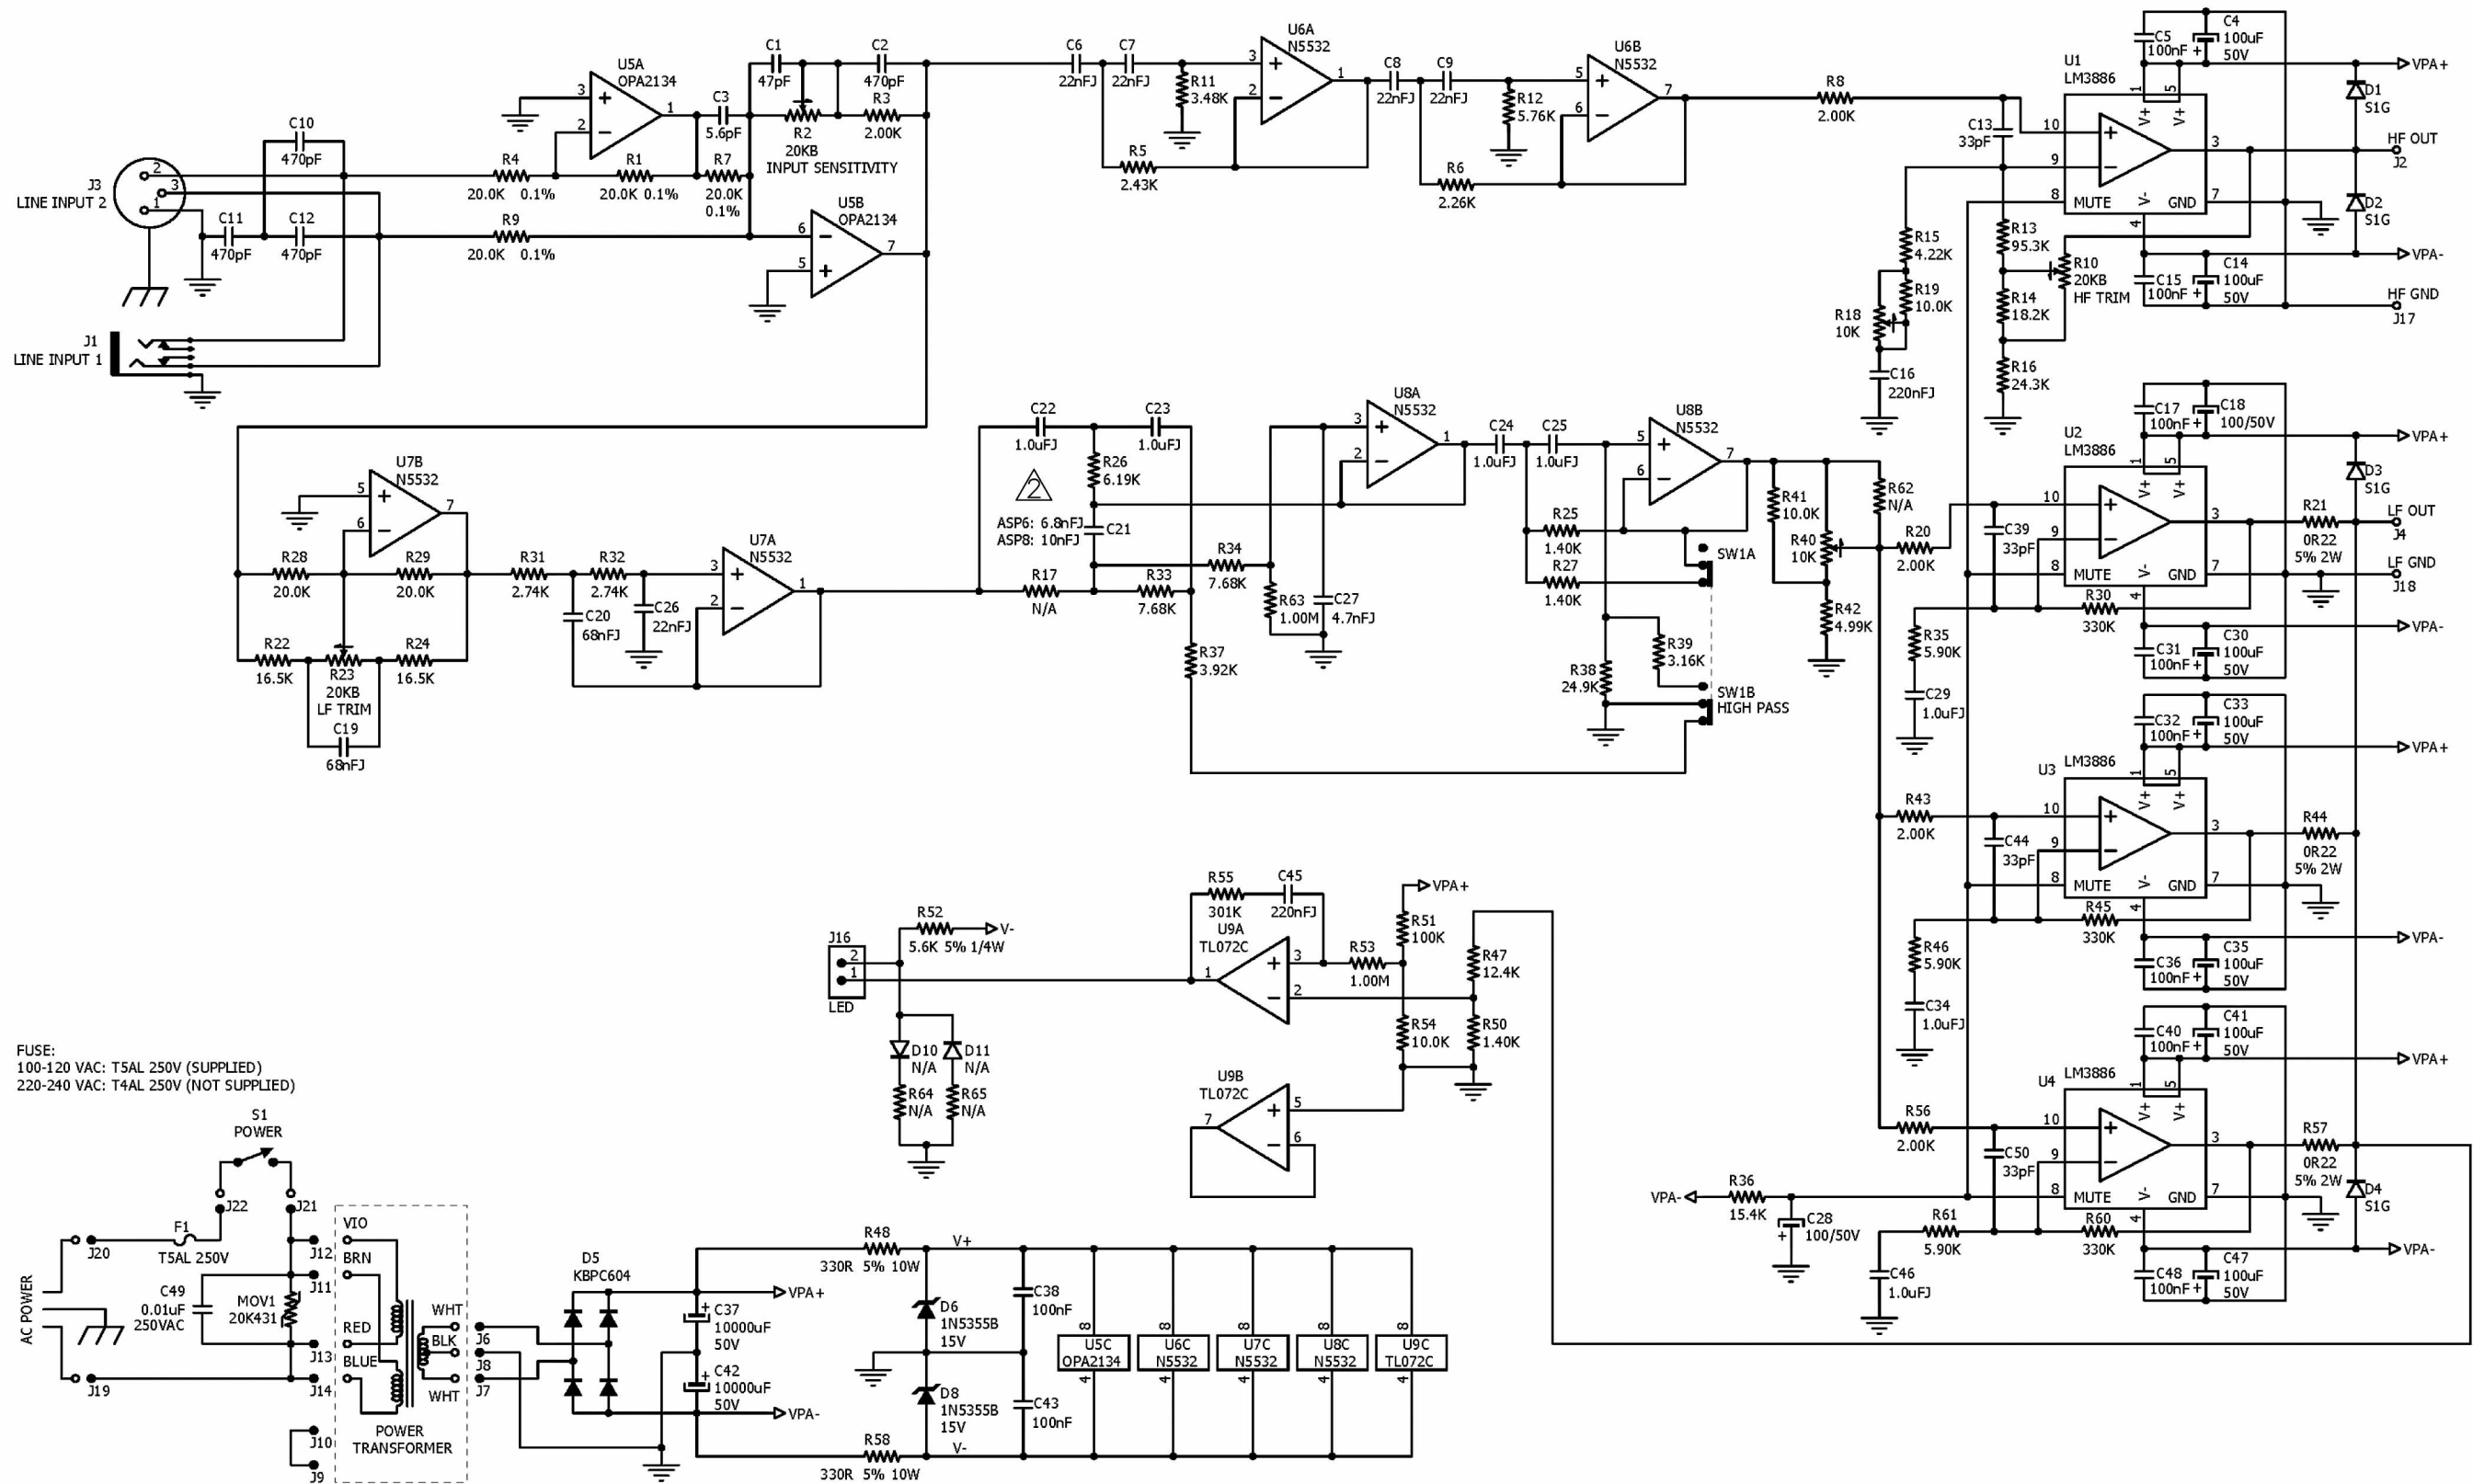

FUSE:
100-120 VAC: T5AL 250V (SUPPLIED)
220-240 VAC: T4AL 250V (NOT SUPPLIED)

1. NOTE: ALL RESISTORS 1% UNLESS NOTED.
N/A=PART OMITTED

750-0024 ASP6: 6.8nFJ FOR C21
750-0025 ASP8: 10nFJ FOR C21

THIS PRINT DISCLOSES SUBJECT MATTER IN WHICH KSC INDUSTRIES INC. HAS PROPRIETARY RIGHTS. THE RECEIPT OR POSSESSION OF THIS PRINT DOES NOT CONFER, TRANSFER OR LICENSE THE USE OF THE DESIGN OR TECHNICAL INFORMATION SHOWN HEREIN, REPRODUCTION OF THIS PRINT OR ANY INFORMATION CONTAINED HEREIN OR MANUFACTURE OF ANY ARTICLE HEREFROM, FOR DISCLOSURE TO OTHERS, IS FORBIDDEN, EXCEPT BY SPECIFIC WRITTEN PERMISSION FROM KSC INDUSTRIES INC.

THIRD PLANE PROJECTION

UNLESS OTHERWISE SPECIFIED
DIMENSIONS AND TOLERANCES
ARE IN MM:

METRIC	ANG.
X.X± 0.5	± 0° 30'
X.XX± 0.20	
X.XXX± 0.050	

TITLE:
ASP6/8 AMP-SCHEMATIC
EVENT#2433 ENG REV 04

SIZE B	DWG. NO: 750-002X	REV A
SCALE: NTS	REF. NO: 102605	CUST. NO: SP2433 04
		SHEET 1 OF 1